


## DS-KIS603-P(C)

### Video Intercom Network Bundle

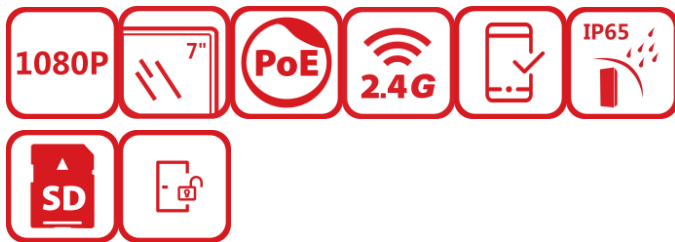

- IP video intercom bundle for villa or house
- One call button for easier calls
- Convenient Hik-Connect APP Mobile Control
- Including: DS-KV6113-WPE1(C) × 1, DS-KH6320-WTE1 × 1, PSU × 2
- Power adapter included in the package

## ▪ Specification


Door station	
Operation system	Embedded Linux operation system
Flash	32 MB
RAM	256MB
Door station	
Camera	2MP HD camera
Night vision	Low illumination IR supplement mode:3 m
Backlight compensation	Support
Digital noise reduction	Support
WDR	True WDR
Field of view	Horizontal: 131° Vertical: 78°
Video Compression Standard	H.264
Stream	Main stream: 1080p@30fps, 720p@25fps Sub stream: D1@25fps
Motion detection	Support
Flash-avoid frequency	50 Hz, 60 Hz
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
Audio intercom	Two-way audio communication
Door station	
Network protocol	TCP/IP, RSTP
Wired network	10/100 Mbps Ethernet
Door station	
RS-485	1
Alarm input	4
Debugging port	1
Grounding	1
TAMPER switch	1
Door station	
Power consumption	< 10 W
Working temperature	-40° C to 53° C(-40° F to 127.4° F)
Working humidity	10% to 95%
Dimension	138 mm × 65 mm × 27 mm
Installation	Surface mounting
Protection level	IP65
Indicator	2
Power supply	IEEE802.3af, standard PoE 12 VDC
Indoor station	
Operation system	Embedded Linux operation system

Memory	128 MB
Flash	32 MB
<b>Indoor station</b>	
Display screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
<b>Indoor station</b>	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
<b>Indoor station</b>	
Wired network	10/100 Mbps self-adaptive
Wireless network	Wi-Fi 802.11 b/g/n
Protocol	TCP/IP, SIP, RTSP
RS-485	1 RJ-45 10/100 Mbps self-adaptive
<b>Indoor station</b>	
RS-485	1
Alarm input	8-ch alarm inputs
Relay output	2
TF card	Max to 32 G, SD 2.0 or lower version
<b>Indoor station</b>	
Power consumption	≤ 6 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (L x W x H)	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")

## ▪ Available Model




DS-KIS603-P(C)
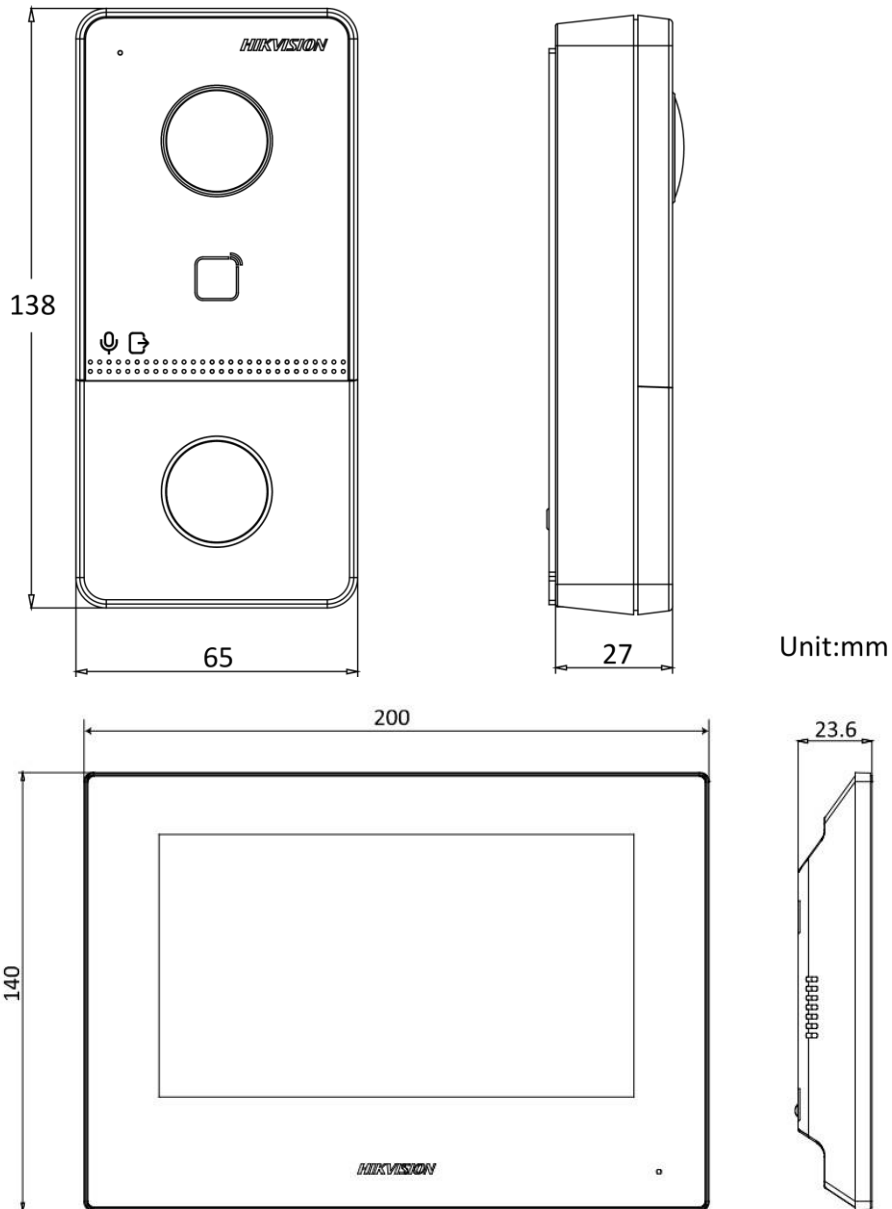
## ▪ Dimension



Unit:mm

- Accessory
- Optional

<b>DS-KABV6113-RS</b> <b>Villa Door Station</b> <b>Rain Shield</b>	<b>DS-KABH6320-T</b> <b>Indoor Station</b> <b>Table Bracket</b>	<b>DS-KABV6113-A</b> <b>Wall-mounted</b> <b>bracket of villa door</b> <b>station</b>
		

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

